


Program	Use
Fiat	 Fiat, Citroen, Peugeot diesel - 2-socket ECU Alfa, Fiat, Lancia - 1.9 Jtd 2.4 Jtd 5-socket ECU IAW49F - Fiat Bravo 1.6 16V IAW 4AF - Fiat Seicento, Panda 1.1 8V Lancia Kappa 2.0i 16V Turbo - 0 261 203 792 Lancia Kappa 2.0i 20V - 0 261 203 670 Lancia Kappa 2.4i 20V - 0 261 203 669 Lancia Kappa 3.0i 24V - 0 261 203 482

Wiring colour codes

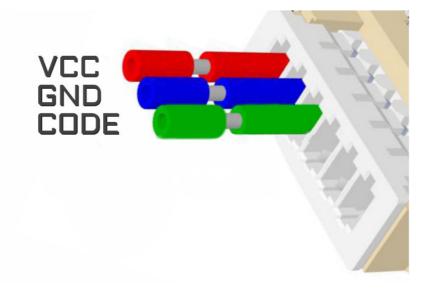

The LED behavior

diagnostic mode - it flashes every second

adjusting to the ECU – flashing 0,1 sec

after adjusting it lights constantly and blinks every other second

Fiat

USE

Fiat, Citroen, Peugeot diesel 2-socket ECU

Alfa, Fiat, Lancia 1.9 Jtd 2.4 Jtd 5-socket ECU

> IAW49F Fiat Bravo 1.6 16V


IAW 4AF Fiat Seicento, Panda 1.1 8V

Lancia Kappa 2.0i 16V Turbo 0 261 203 792

> Lancia Kappa 2.0i 20V 0 261 203 670

> Lancia Kappa 2.4i 20V 0 261 203 669

Lancia Kappa 3.0i 24V 0 261 203 482 (Bosch M3.7.1)




CARLABIMMO.COM





Fiat, Citroen, Peugeot diesel 2-socket ECU

> After modifying **5P08C3** memory in line **180** into **00** values, connect the emulator in place of the original immobiliser



Connecting emulator to ECU





CARLABIMMO.COM


Alfa, Lancia, Fiat 1.9 Jtd 2.4 Jtd 5-socket ECU




In addresses from **1EA** to **1F9** change these values into **00** in **24C04** memory




Connecting emulator to ECU









ATTENTION!

When putting ECU back together, put a piece of cardboard on the wire making sure not to tighten it firmly in this area. Alternatively, break off a piece of clamp holder and drag the cable over to the other side







IAW49F Fiat Bravo 1.6 16V




Find memory **95040** in ECU and then program it according to picture below




Connecting emulator to ECU







Cut off pin 13 from wiring in the car !!!

IAW 4AF Fiat Seicento, Panda 1.1 8V

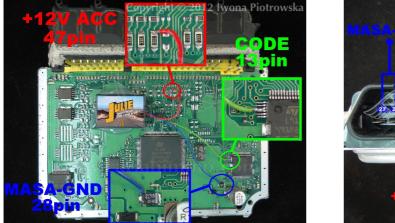



Cut off pin 13 from wiring in the car !!!

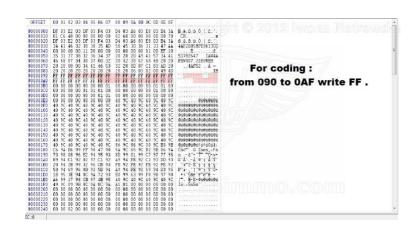

Find memory **95160** in ECU and then program it according to picture below

Lancia Kappa 2.0i 16V Turbo 0 261 203 792





CARLABIMMO.COM



Connect immo line to pin 55. Disconnect immo. Connect A6 and A5 together.


To have diagnosis, the immo line must be made in the reset button.

This device self-learns ECU code

Lancia Kappa 2.0i 20V 0 261 203 670







To have diagnosis, the immo line must be made in the reset button. Connect A6 and A5 together.

This device self-learns ECU code

Lancia Kappa 2.4i 20V 0 261 203 669



Connect immo line to pin 55. Disconnect immo. Connect A6 and A5 together. To have diagnosis, the immo line must be made in the reset button.

ACC	27 pin
GND	19 pin
Code	55 pin


This device self-learns ECU code

CARLABIMMO.COM


See all emulators

Lancia Kappa 3.0i 24V 0 261 203 482 (Bosch M3.7.1)





Connecting emulator to ECU



This device self-learns ECU code



Warning!!!

Due to possible construction changes of cars, check signals with multimeter in the ECU plug.



All rights reserved. Unauthorized copying, hiring, lending, public performance will be punished!

We state that we are the only authentic authors of this manual. We possess copyright of this publication. Any trials of unauthorized copying, hiring, quoting prohibited!!! Both service and advertisement constitute copyright and they are the subject to the protection in accordance with the Act from 4th Feb. 1994 on Copyright and Related Laws (Statute Book no. 24 position 93) and protection on the basis of the Act from 8th June 1993 on combating an unfair competition (Statute Book no. 47 position 211)

www.carlabimmo.com

Last updated 18.07.2024